


SLM758

\_V1.01

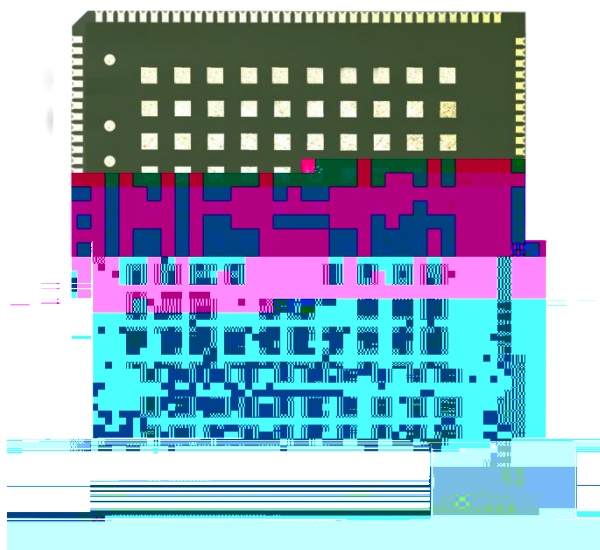


	SLM758
	V1.01
	2017 5

1.

2.



	Qualcomm MSM8953
	Octa-core A53 (64bit) 8*2.0GHz
CPU	* Octa-core A53 (64bit) 8*1.8GHz
	* Octa-core A53 (64bit) 8*2.2GHz
GPU	Adreno506; 650MHz



	CDMA: BC0 GSM: B5/3/8	
Wi-Fi	IEEE 802.11 a/b/g/n 2.4G&5G * 11ac * 5G FEM	
Bluetooth	BT4.1	
GNSS	GPS/Beidou/Glonass/Galileo	
	TD-LTE	Cat4 TD-LTE 117/30Mbps
	FDD-LTE	Cat4 FDD-LTE 150/50Mbps
	DC-HSPA+	42/11.2Mbps
	TD-HSPA	2.8/2.3Mbps
	EVDO Rev.A	3.1/1.8Mbps
	EDGE	Class12, 236.8kbps/236.8kbps
	GPRS	Class12, 85.6kbps/85.6kbps
SIM	DSDS 3.0/1.8V SIM L/W/G/T+G L/W/G/T+W L/W/G/T+1X L/EVDO/CDMA1X+G CDMA	
Display	Matrix: FULL HD: 1920*1200 60fps;	
	LCM Size: User defined	
	Interface: 1st LCM MIPI DSI 4-lane; 2nd LCM MIPI DSI 4-lane	
Camera	Interface: CSI 4-Lane	
	Pixel: 13-24Mp/ up to 13Mp ISP 13MP Camera	
	Video decode	4K 30fps, 1080p 60fps, H.264/H.265 MP4/ WMV9/ VC1/ DivX/ VP8/VP9
	Video encode	4K 30fps,1080p 60 fps: H.264/ H.265/ MP4/ VP8 1080P 60fps De +1080p 30fps En
	home + - TP	
Reset		
	VBAT	3pin 3.4V 4.2V 3.8V
	SDIO *1	SD3.0; eMMC v5.1

USB

## 4. SLM758

SLM758 272pin

PIN#	SLM758 Pin name	Pad characteristics	Functional description
1	GND	GND	GND
2	FLASH_LED1+	AO	FLASH LED anode(1A)
3	GND	GND	GND
4	PMI8952_MPP1	AO-Z,AI,DO	Configurable MPP,PWM,ADC
5	LCD_BL_LED_K1	AI	LCD Backlight cathode1(20mA)
6	LCD_BL_LED_K2	AI	LCD Backlight cathode2(20mA)
7	LCD_BL_LED_A	PO	LCD Backlight anode
8	PMI_HAP_OUT_N	AO	Haptics driver output negative
9	PMI_HAP_OUT_P	AO	Haptics driver output positive
10	GND	GND	GND
11	UART2_MSM_TX	B-PD:nppukp	Configurable I/O,UART2 TX
12	UART2_MSM_RX	B-PD:nppukp	Configurable I/O,UART2 RX
13	GPIO6_I2C2_SDA	B-PD:nppukp	Configurable I/O, I2C SDA
14	GPIO7_I2C2_SCL	B-PD:nppukp	Configurable I/O, I2C SCL
15	GPIO12_UART4_TX	B-PD:nppukp	Configurable I/O,UART4 TX
16	GPIO13_UART4_RX	B-PD:nppukp	Configurable I/O,UART4 RX
17	GPIO14_SENSOR_I2C4_SDA	B-PD:nppukp	Configurable I/O,SENSOR I2C SDA
18	GPIO15_SENSOR_I2C4_SCL	B-PD:nppukp	Configurable I/O, SENSOR I2C SCL
19	GPIO42_ACCL_INT1	B-PD:nppukp	Configurable I/O,ACC INT
20	GPIO43_ALSP_INT_N	B-PD:nppukp	Configurable I/O,ALSP INT
21	GPIO44_MAG_INT	B-PD:nppukp	Configurable I/O,MAG INT
22	GPIO45_GYRO_INT	B-PD:nppukp	Configurable I/O,GYRO INT
23	GND	GND	GND
24	GPIO85_KEY1_VOL+	B-PD:nppukp	Configurable I/O,KEY VOL+
25	GPIO86_KEY2_SNAPSHOT	B-PD:nppukp	Configurable I/O,KEY VOL- or SNAPSHOT
26	GPIO87_KEY3_FOCUS	B-PD:nppukp	Configurable I/O,KEY HOME or FOCUS
27	GPIO88_KEY4_HOME	B-PD:nppukp	Configurable I/O,KEY HOME
28	GND	GND	GND
29	VREG_L11_2P95	PO	PMIC output 2.95V for SD-card power

30	VREG_L12_PX2_2P95	PO	PMIC output 2.95V for SDC2 signal
31	GPIO133_SDCARD_DET_N	B-PD:nppukp	Configurable I/O,SD card detection
32	SDC2_SDCARD_D0	BH-NP:pdpukp	Secure digital controller 2 data bit 0
33	SDC2_SDCARD_D1	BH-NP:pdpukp	Secure digital controller 2 data bit 1
34	SDC2_SDCARD_D2	BH-NP:pdpukp	Secure digital controller 2 data bit 2
35	SDC2_SDCARD_D3	BH-NP:pdpukp	Secure digital controller 2 data bit 3
36	SDC2_SDCARD_CMD	BH-NP:pdpukp	Secure digital controller 2 command
37	SDC2_SDCARD_CLK	BH-NP:pdpukp	Secure digital controller 2 clock
38	GND	GND	GND
39	GND	GND	GND
40	MIPI_CSI2_CLK_P	AI	MIPI camera serial interface 2 clock+
41	MIPI_CSI2_CLK_N	AI	MIPI camera serial interface 2 clock-
42	MIPI_CSI2_LANE0_P	AI	MIPI camera serial interface 2 lane0+
43	MIPI_CSI2_LANE0_N	AI	MIPI camera serial interface 2 lane0-
44	MIPI_CSI2_LANE1_P	AI	MIPI camera serial interface 2 lane1+
45	MIPI_CSI2_LANE1_N	AI	MIPI camera serial interface 2 lane1-
46	MIPI_CSI2_LANE3_P	AI	MIPI camera serial interface 2 lane3+
47	MIPI_CSI2_LANE3_N	AI	MIPI camera serial interface 2 lane3-
48	MIPI_CSI2_LANE2_P	AI	MIPI camera serial interface 2 lane2+
49	MIPI_CSI2_LANE2_N	AI	MIPI camera serial interface 2 lane2-
50	GND	GND	GND
51	MIPI_CSI0_CLK_P	AI	MIPI camera serial interface 0 clock+
52	MIPI_CSI0_CLK_N	AI	MIPI camera serial interface 0 clock-
53	MIPI_CSI0_LANCLK		

---

66	MIPI_DSI0_LANE1_N	AO	MIPI display serial interface 0 lane1-	
67	MIPI_DSI0_LANE1_P	AO	MIPI display serial interface 0 lane1+	
68	GND	GND	GND	
69	5G_ANT	AI	RF signal for 5G WIFI	
70	GND	GND	GND	
71	<b>MIPI_DSI0_LANE2_N</b>	AO	MIPI dism	A

102	UIM2_RESET	B-PD:nppukp	Configurable I/O,UIM2 reset
103	UIM2_CLK	B-PD:nppukp	Configurable I/O,UIM2 clock
104	UIM2_DATA	B-PD:nppukp	Configurable I/O,UIM2 data
105	VREG_L15_UIM2	PO	PMIC output for UIM2
106	GPIO54_UIM1_DET	B-PD:nppukp	Configurable I/O,UIM1 removal detection
107	UIM1_RESET	B-PD:nppukp	Configurable I/O,UIM1 reset
108	UIM1_CLK	B-PD:nppukp	Configurable I/O,UIM1 clock
109	UIM1_DATA	B-PD:nppukp	Configurable I/O,UIM1 data
110	VREG_L14_UIM1	PO	PMIC output for UIM1
111	GND	GND	GND
112	PM8953_MPP2	AO-Z,DI,DO	Configurable MPP,PWM,ADC
113	VCOIN	AI,AO	Coin-cell battery or backup battery
114	LINEOUT_M	AO	Audio lineout minus for audio PA
115	LINEOUT_P	AO	Audio lineout plus for audio PA
116	GND	GND	GND
117	MAIN_ANT	AI	RF signal for main ANT
118	GND	GND	GND
119	GND	GND	GND
120	MIC_BIAS2	AO	Microphone bias #2 for earphone mic
121	MIC_BIAS1	AO	Microphone bias #1
122	MIC_IN1_P	AI	Microphone 1 input plus
123	MIC_IN1_M	AI	Microphone 1 input minus
124	GND_MIC	GND	Microphone bias filter ground
125	CDC_HS_DET	AI	MBHC mechanical insertion0_

138	VREG_L10_2P8_SENSOR	PO	PMIC output 2.8V for sensor
139	VREG_L6_1P8	PO	PMIC output 1.8V for LCD,CAM,TP,sensor
140	VREG_L5_1P8	PO	PMIC output 1.8V for digital I/Os
141	PM_RESIN_N1	DI	KEY RESET or VOL-
142	KYPD_PWR_N1	DI	KEY POWER ON/OFF
143	USB_ID	AI	USB ID
144	GND	GND	GND
145	USB_HS_D_M	AI,AO	USB data minus
146	USB_HS_D_P	AI,AO	USB data plus
147	GND	GND	GND
148	BAT_CON_ID	AI	Battery ID input to ADC
149	BAT_THERM	AI	Battery temperature input to ADC
150	GND	GND	GND
151	VBAT	PI,PO	Battery,3.5V-4.2V,default 3.8V
152	VBAT	PI,PO	Battery,3.5V-4.2V,default 3.8V
153	VBAT	PI,PO	Battery,3.5V-4.2V,default 3.8V
154	GND	GND	GND
155	GND	GND	GND
156	GND	GND	GND
157	VBUS	PI,PO	USB Voltage
158	VBUS	PI,PO	USB Voltage
159	VBUS	PI,PO	USB Voltage
160	GND	GND	GND
161	GND	GND	GND
162	HAPTICS_CDC_LOUT3	AI	HAPTICS PWM in for motor
163	Reserved		Reserved
164	GPIO98_I2C8_SDA	B-PD:nppukp	Configurable I/O, I2C SDA
165	GPIO99_I2C8_SCL	B-PD:nppukp	Configurable I/O, I2C SCL
166	GPIO33	B-PD:nppukp	Configurable I/O
167	GPIO35	B-PD:nppukp	Configurable I/O
168	GPIO36	B-PD:nppukp	Configurable I/O
169	GPIO134	B-PD:nppukp	Configurable I/O



---

210	GND	GND	GND
211	GND	GND	GND
212	GPIO66	B-PD:nppukp	Configurable I/O
213	GND	GND	GND
214	GND	GND	GND
215	GND	GND	GND
216	GND	GND	GND
217	VREG_L13_3P075	PO	PMIC output 3.075V for audio codec
218	GND		

246	MIPI_DSI1_LANE3_N	AO	MIPI display serial interface 1 lane3-
247	WCD_INTR2	B-PD:nppukp	WCD9326 INT2
248	WCD_INTR1	B-PD:nppukp	WCD9326 INT1
249	GPIO128	B-PD:nppukp	Configurable I/O,
250	GPIO41	B-PD:nppukp	Configurable I/O,
251	GPIO38	B-PD:nppukp	Configurable I/O,
252	GND	GND	GND
253	GPIO19_NFC_I2C5_SCL	B-PD:nppukp	Configurable I/O,NFC I2C SCL
254	GPIO18_NFC_I2C5_SDA	B-PD:nppukp	Configurable I/O, NFC I2C SDA
255	GPIO17_UART5_RX	B-PD:nppukp	Configurable I/O,UART5RX
256	GPIO16_UART5_TX	B-PD:nppukp	Configurable I/O,UART5 TX
257	GND	GND	GND
258	GPIO3_SPI1_CLK	B-PD:nppukp	Configurable I/O, SPI CLK
259	GPIO2_SPI1_CS	B-PD:nppukp	Configurable I/O, SPI CS
260	GPIO1_SPI_MISO	B-PD:nppukp	Configurable I/O, SPI MISO
261	GPIO0_SPI_MOSI	B-PD:nppukp	Configurable I/O, SPI MOSI
262	GPIO132_DCAM_PWD_N	B-PD:nppukp	Configurable I/O, Depth camera pwn
263	GPIO131_DCAM_RST_N	B-PD:nppukp	Configurable I/O,Depth camera reset
264	GPIO28_CAM_MCLK2	B-PD:nppukp	Configurable I/O,Depth camera MCLK
265	GPIO140_FP_RST_N	B-PD:nppukp	Configurable I/O, fingerprint RESET
266	GPIO138_FP_SPI_MISO	B-PD:nppukp	Configurable I/O, fingerprint SPI MISO
267	GPIO137_FP_SPI_MOSI	B-PD:nppukp	Configurable I/O, fingerprint SPI MOSI
268	GPIO136_FP_SPI_CS	B-PD:nppukp	Configurable I/O, fingerprint SPI CS
269	GPIO135_FP_SPI_CLK	B-PD:nppukp	Configurable I/O, fingerprint SPI CLK
270	GPIO48_FP_INT_N	B-PD:nppukp	Configurable I/O, fingerprint INT
271	GPIO141	B-PD:nppukp	Configurable I/O,
272	GND	GND	GND

# 5. 2D

TOP

